


GDI-6

GDI Fuel Injector Cleaner & Tester

Ultrasonic
cleaning tank

1L
About

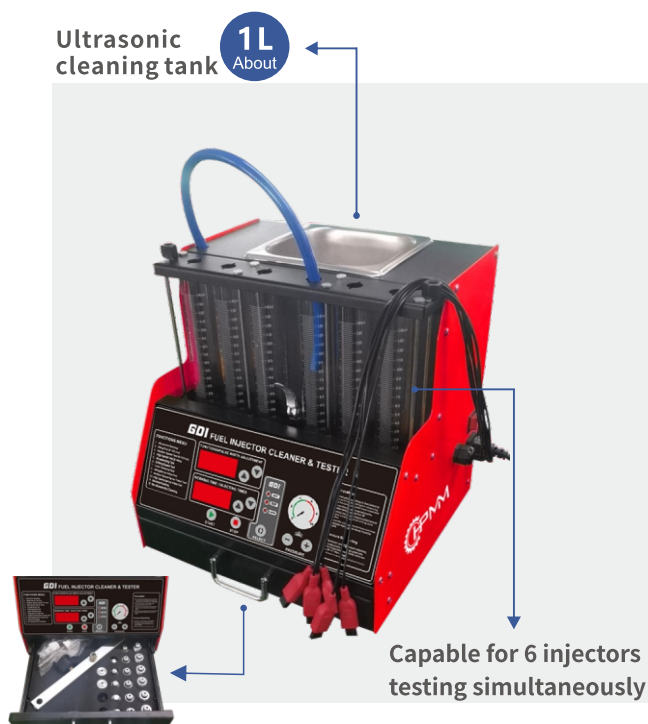

Capable for 6 injectors
testing simultaneously

Easy access tool drawer

Technical Parameter

Testing solvent tank capacity	1500 mL
Test tube amount	140 mL
RPM range	0~7500 r/min
Time range	0~9900 times
PWM pulse width	0~20.0 ms
System pressure	0~0.55Mpa (adjustable)
Timing	0~20 minutes adjustable
Ultrasonic cleaning power	60W (intermittent work)
Ultrasonic cleaning frequency	28 KHz $\pm$ 0.5 KHz
Dimensions	390mm (L) $\times$ 410mm (W) $\times$ 430 mm (H)
Weight	16.6kg

Working Environment

Power supply	AC220V $\pm$ 10%
Frequency	50-60Hz $\pm$ 0.5
Relative humidity	<85%
Ambient temperature	0°C ~ +40°C
External magnetic field strength	<400A/m

Main Function

- Works for GDI and other types of injector
- Ultrasonic injector cleaning
- Simulate different working state of engine to test the injector working condition and injection quality
- Ability to reverse flush for cleaning

Fit for GDI injectors



Features



Clear LED
digital display



Contains manual
oil draining function