



广州晶佳汽车设备有限公司
GUANGZHOU JINGJIA AUTO EQUIPMENT CO., LTD.



**GARAGE
EQUIPMENT**
www.unitequipment.com



2023

GUANGZHOU JINGJIA AUTO EQUIPMENT CO., LTD

Tel: 86-20-36747082/36350276/86274320/86274345

Http://www.chinapuli.com E-mail: export@chinapuli.com





PL-JB90201 PL-JB90401 PL-JB90601 PL-JB90801 PL-JB91001 PL-JB91201 PL-JB91601 PL-JB92001 PL-JB93201 PL-JB95001

Bottle Jack

SPECIFICATIONS										
MODEL	PL-JB90201	PL-JB90401	PL-JB90601	PL-JB90801	PL-JB91001	PL-JB91201	PL-JB91601	PL-JB92001	PL-JB93201	PL-JB95001
CAPACITY	2.0T	4.0T	6.0T	8.0T	10T	12T	16T	20T	32T	50T
MIN. H	158MM	180MM	197MM	205MM	205MM	215MM	225MM	244MM	285MM	300MM
MAX. H	308MM	350MM	382MM	390MM	390MM	400MM	425MM	449MM	465MM	480MM
LIFTING. H	90MM	110MM	125MM	125MM	125MM	125MM	140MM	145MM	180MM	180MM
ADJUST. H	60MM	60MM	60MM	60MM	60MM	60MM	60MM	60MM	/	/
N.W/G.W.	2.2/24KG	3.2/27KG	4.1/27KG	4.9/27KG	5.5/24KG	6.5/14.5KG	7.6/16.5KG	9.9/22KG	22/23KG	30/31KG



PL-JF90201
Plastic box



PL-JF90202
Colorful packing box



PL-JF90203
Plastic box



PL-JF90204
Colorful packing box

Floor Jack

SPECIFICATIONS				
MODEL	PL-JF90201	PL-JF90202	PL-JF90203	PL-JF90204
CAPACITY	2.0T	2.0T	2.0T	2.0T
MIN. H	125MM	125MM	135MM	135MM
MAX. H	300MM	300MM	335MM	335MM
LIFTING. H	175MM	175MM	200MM	200MM
N.W/G.W.	6.5/7.5KG	6.5/7.0KG	8.5/9.5KG	8.5/9.0KG



PL-JF90301
Colorful packing box



PL-JF90302/JF90303/JF90304
Colorful packing box



PL-JF90305/JF90306/JF90307
Colorful packing box

Floor Jack

SPECIFICATIONS							
MODEL	PL-JF90301	PL-JF90302	PL-JF90303	PL-JF90304	PL-JF90305	PL-JF90306	PL-JF90307
CAPACITY	3.0T	3.0T	3.0T	3.0T	3.0T	3.0T	3.0T
MIN. H	75MM	135MM	135MM	135MM	135MM	135MM	140MM
MAX. H	500MM	495MM	495MM	495MM	495MM	495MM	460MM
LIFTING. H	320MM	360MM	360MM	360MM	360MM	360MM	400MM
N.W/G.W.	32/33KG	36/37KG	34/35KG	32/33KG	30/31KG	28/29KG	22/23KG



PL-JL90201
Wooden box



PL-JL90301/JL90302/JL90501
Wooden box



PL-JL91001/JL91501/JL92001
Wooden box

Floor Jack

SPECIFICATIONS							
MODEL	PL-JL90201	PL-JL90301	PL-JL90302	PL-JL90501	PL-JL91001	PL-JL91501	PL-JL92001
CAPACITY	2.0T	3.0T	3.0T	5.0T	10T	15T	20T
MIN. H	140MM	140MM	140MM	160MM	170MM	220MM	220MM
MAX. H	800MM	660MM	660MM	560MM	570MM	680MM	680MM
LIFTING. H	660MM	520MM	520MM	400MM	400MM	460MM	460MM
N.W/G.W.	58/62KG	58/62KG	70/82KG	90/103KG	130/145KG	170/185KG	215/230KG



S25-2J



S40-2J



S50-2J



S50-3J



S60-2J

Pneumatic Jack

SPECIFICATIONS					
MODEL	S25-2J	S40-2J	S50-2J	S50-3J	S60-2J
CAPACITY	25T/10T	40T/20T	50T/25T	50T/25T/10T	60T/40T
MIN. H / MAX. H	183/494MM	190/504MM	215/564MM	150 /432MM	220/580MM
LIFTING. H	25T:97MM 10T:95MM	40T:106MM 20T:88MM	50T:115MM 25T:114MM	50T:62MM 25T:61MM 10T:69MM	60T:121MM 40T:119MM
EXTENSION. H	75+45MM	75+45MM	75+45MM	75+45MM	75+45MM
N.W/G.W.	53/56KG	62/65KG	73/76KG	61/64KG	85/88KG



S60-3J



S80-2J



S30-2QL



S30-4QL



S40-2EL

Pneumatic Jack

SPECIFICATIONS					
MODEL	S60-3J	S80-2J	S30-2QL	S30-4QL	S40-2EL
CAPACITY	60T/40T/20T	80T/50T	30T/15T	40T/20T	40T/20T
MIN. H / MAX. H	177/544MM	230/563MM	170/459MM	170/459MM	151/410MM
LIFTING. H	60T:82MM 40T:81MM 20T:84MM	80T:111MM 50T:102MM	40T:86MM 20T:83MM	40T:88MM 20T:81MM	40T:73MM 20T:66MM
EXTENSION . H	75+45MM	75+45MM	75+45MM	75+45MM	75+45MM
N.W/G.W.	73/76KG	106/109KG	106/109KG	106/109KG	106/109KG



PL-EC90101

PL-EC90201

PL-EC90202

PL-EC90301

Engine Crane

SPECIFICATIONS

MODEL	PL-EC90101	PL-EC90201	PL-EC90202	PL-EC90301
LIFTING WT	1.0T	2.0T	2.0T	3.0T
LIFTING. H	2000MM	2000MM	2000MM	2500MM
N.W/G.W.	70/74KG	75/78KG	90/96KG	112/116KG



PL-ES90101

PL-ES90102

PL-ES90103

PL-ES90104

Engine Stand

SPECIFICATIONS


MODEL	PL-ES90101	PL-ES90102	PL-ES90103	PL-ES90104
LIFTING WT	750LBS	1000LBS	1250LBS	2000LBS
LIFTING. H	780MM	780MM	820MM	810MM
N.W/G.W.	19/20KG	22/23KG	25/26KG	38/40KG



High Transmission Jack

SPECIFICATIONS

MODEL	CAPACITY	MIN. H	MAX. H	STROKE		GR WT
				1ST STAGE	2ND STAGE	
PL-EH90101	0.5T	1100MM	1900MM	/	/	32KG
PL-EH90102	0.5T	1200MM	2000MM	/	/	40.5KG
PL-EH90103	0.5T	870MM	1800MM	465MM	465MM	86KG
PL-EH90104	0.5T	850MM	1750MM	450MM	450MM	68KG

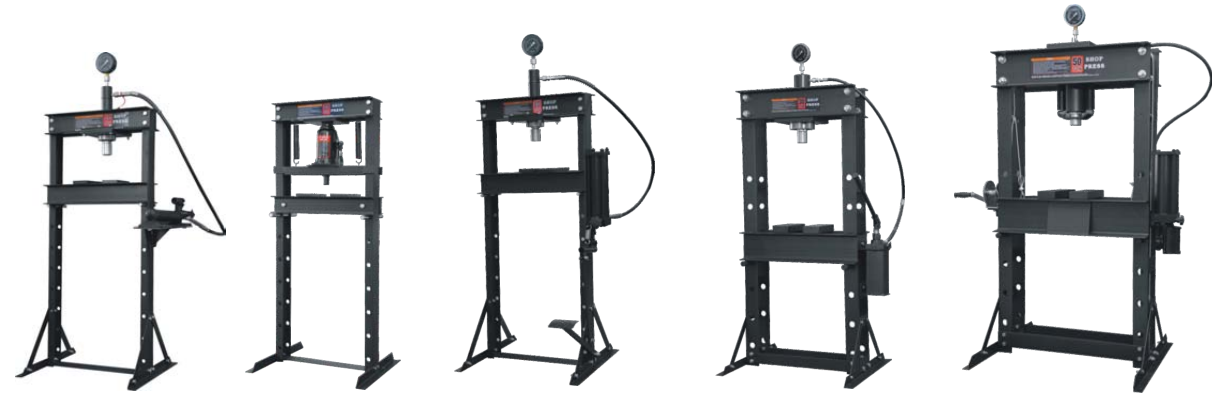

PL-PS91001

PL-PS92001

PL-PS92002

PL-PS93001

PL-PS95001

Shop Press

SPECIFICATIONS

MODEL	PL-PS91001	PL-PS92001	PL-PS92002	PL-PS93001	PL-PS95001
CAPACITY	10T	20T	20T	30T	50T
WORKING RANGE	90-858MM	80-1080MM	0-955MM	130-820MM	100-885MM
STROKE	135MM	145MM	190MM	150MM	235MM
N.W/G.W.	70/72KG	70/72KG	90/92KG	129/142KG	235/267KG



PL-EL90101

PL-EL90102

PL-EL90103

PL-EL90104

PL-EL90105

Low Transmission Jack

SPECIFICATIONS

MODEL	PL-EL90101	PL-EL90102	PL-EL90103	PL-EL90104	PL-EL90105
CAPACITY	0.5T	1.0T	1.5T	2T	3T
MIN. H	190MM	200MM	230MM	210MM	120MM
MAX. H	780MM	760MM	890MM	960MM	880MM
N.W/G.W.	40/47KG	60/68KG	84/92KG	128/135KG	95/105KG



PL-JS90201

PL-JS90301

PL-JS90601

PL-JS91201

2T-12T

Jack Stand

SPECIFICATIONS

MODEL	LIFTING WT	MIN. H	MAX. H	PACKAGE SIZE	GR WT/C
PL-JS90201	2T	280MM	425MM	19x18x34CM	4.6/5KG
PL-JS90301	3T	285MM	425MM	19.5x18x34.5CM	4.7/5.5KG
PL-JS90601	6T	390MM	595MM	28x23.5x42CM	9/10KG
PL-JS91201	12T	482MM	747MM	33x30x58CM	23.5/25KG



PL-CR90002

PL-CR90003

PL-CR90004

PL-CR90005/CR90006

Car Creeper & Work Seat

SPECIFICATIONS

MODEL	PL-CR90002	PL-CR90003	PL-CR90004	PL-CR90005	PL-CR90006
N.W/G.W.	7.2/8.2KG	5.5/6KG	5.7/6.6KG	4/4.5KG	5/5.5KG
PRODUCT SIZE	102X42.5X11CM	44X36X36.5CM	38X38X57.5CM	36"	40"
PACKAGE SIZE	104X44X12.5CM	45X36.5X24CM	40X40X16CM	8X42X93CM	9X49X104CM
QTY/20'CY	465	690	1120	580	500



PL-JD90101



PL-JD90102



PL-JD90103



PL-JD90104

Vulcanizing Machine

SPECIFICATIONS

MODEL	PL-JD90101	PL-JD90102	PL-JD90103	PL-JD90104
INPUT POWER	2X450W	2X500W	2X500W	500W
TEMPERATURE RANGE	0-300°C	145°C-165°C	145°C-165°C	145°C-165°C
REPAIR AREA	80X70MM²	100X80MM²	100X80MM²	60X80MM²
N.W/G.W.	64/66KG	43.3/46.4KG	10/11KG	7.9/8.3KG



PL-PV90101



PL-PV90102

Hydraulic Vehicle Positioning Jack

SPECIFICATIONS

MODEL	RIM WIDTH	CAPACITY	NET WT	GR WT	PACKAGE SIZE	QTY/20'CY
PL-PV90101	12 INCH	1500LBS	18KG	19KG	68X62X22CM	300
PL-PV90102	9 INCH	1500LBS	17KG	18KG	62X62X22CM	324

Wheel Weights

FE STICK

60G
5G*4+10G*4

FE-129



60G
5G*12

FE-139



30Z
1/4OZ*12

FE-359



30Z
1/2OZ*12

FE-399



FOR **ALLOY** RIM
FE-319B



FOR **STEEL** RIM
FE-329B



ZN STICK

60G
5G*12

ZN-519



FOR **ALLOY** RIM
ZN-179



FOR **STEEL** RIM
ZN-189B



PB STICK

FOR **ALLOY** RIM
PB-529



FOR **STEEL** RIM
FE-539



FOR **HEAVY TRUCK**
PB-559



PB-889



60G
5G*12

PB-219



Tyre Equipment



PL-C1000
Bead Breaker

Suit for 17.5" to 24.5" rims
N.W/G.W 32/34KG
Qty/Carton 2sets/3cartons
Package size 123*26*12CM
41*35*27CM
41*35*27CM



PL-C1200
Bead Breaker

Suit for any 20", 22.5" & 24.5"
tube & tubeless truck tires up to 13" wide
N.W/G.W 24/25KG
Qty/Carton 2sets
Package size 140.5*27*28.5CM



PL-C1300
Bead Breaker

Suit for 17.5" to 24.5" rims
N.W/G.W 28/30KG
Qty/Carton 2sets
Package size 140.5*27*28.5CM



PL-C1400
Bead Breaker

Suit for 17.5" to 24.5" rims
N.W/G.W 27/29KG
Qty/Carton 2sets
Package size 52*38*70CM



PL-C1500
Slide hammer

The slide hammer wedge is forced between the
bead and rim flange. An spring action reduces
slide hammer kickback.
N.W/G.W 24/25KG
Qty/Carton 2sets
Package size 130*14*7CM



PL-C1600
Mount / Demount tool set

Mount/Demount tool set
Suit for most truck tire
N.W/G.W 85KG/90KG
Qty/carton 10sets/2cartons
Package size 109*17*28CM



PL-C1600C
Mount / Demount tool set

Suit for most truck tire
N.W/G.W 90KG/95KG
Qty/carton 10sets/2cartons
Package size 109*17*28CM
88*17*28CM



PL-C1700
Mount / Demount tool set

Suit for most truck tire
N.W/G.W 40/42KG
Qty/carton 20pcs
Package size 88*17*28CM



PL-C1800
Tyre layering extractor

Suit for most tube tire of truck
N.W/G.W 45/46KG
Qty/Carton 10sets
Package size 109*17*28CM



PL--D1100
Hydraulic Bead Breaker

Bead breaking force:10 Tons
Working stroke: 3.75"
Weight: 33 Lbs
Package Size:38x380x14.5cm



PL--D1200
Hydraulic Bead Breaker

Bead breaking force:13.8 Tons
Working stroke: 4"
Weight: 28.6 Lbs
Package Size: 50 x 15x16.5cm

Air Operated Truck Tire Spreader
PL-S825



Air pressure:8-12kg/cm²
Package size :126X96X83cm
N.W/G.W.:95/125KG

Air Operated Truck Tire Spreader
PL-S275



Air pressure:8-10kg/cm²
Package size :57X57X103cm
N.W/G.W.:47/52KG

Air Operated Truck Tire Spreader
PL-M275



Air pressure:8-10kg/cm²
Package size :81X31X31cm
N.W/G.W.:21/23KG

Manual Desk Tire Spreader
PL-MB275



Package size :66X16X22cm
N.W/G.W.:7.5/8KG

Portable air Operated Tire Spreader
PL-A275



Air pressure:6-8kg/cm²
Package size :45X10X26cm
N.W/G.W.:8/10KG

Mobile Tire & Wheel Lift
PL-LM120



Air pressure:8-10kg/cm²
Package size :1425X305X235cm
N.W/G.W.:70/81KG

Car Tire Test Tanks
PL-T820



Air pressure:6-8kg/cm²
Package size :110X112X67cm
N.W/G.W.:90/127KG

Truck Tire Test Tanks
PL-T1350



Air pressure:6-12kg/cm²
Package size :76X152X93cm
N.W/G.W.:245/280KG

Wheel Dolly
PL-T300



Lifting WT:300LB
Package size :82X58X18cm
N.W/G.W.:8/10KG

Wheel Dolly
PL-T300A



Lifting WT:300LB
Package size :82X58X18cm
N.W/G.W.:12/14KG

Wheel Dolly
PL-T500



Lifting WT:1T
Package size :116X90X16cm
N.W/G.W.:68/75KG

Tire Carrier Dolly
PL-T400



Stack H.:150cm
Package size:150X64X24cm
N.W/G.W.:17/21KG

Inflation Cage
PL-300




Product size:19.5X21.75X50cm
Package size :136X76X33cm
N.W/G.W.:72/88KG

Inflation Cage
PL-400



Product size:28X22X50cm
Package size :136X76X40cm
N.W/G.W.:101/120KG

Tire Carrier Dolly
PL-T250

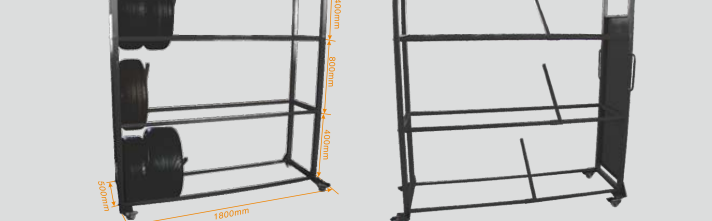

Package size :182X66X12cm
N.W/G.W.:44.5/50KG

Inflation Cage
PL-500




Product size:36X22X50cm
Package size :136X76X47cm
N.W/G.W.:129/150KG

Inflation Cage
PL-600



Product size:41X30X54cm
Package size :140X105X31cm
N.W/G.W.:194/215KG

Tyre Equipment

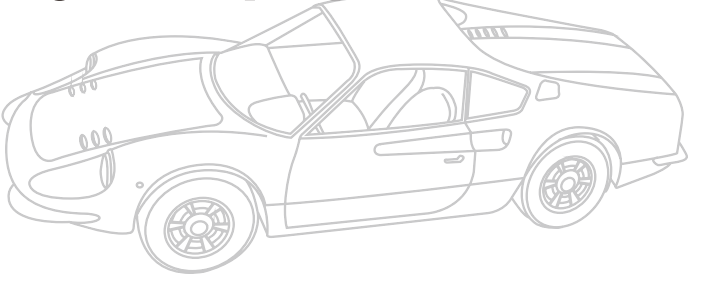



Strut spring compressor

SPECIFICATIONS			
MODEL	PL-T01	PL-T02A	PL-T03
CAPACITY	1T	1T	1T
NET WT	36KG	22KG	32KG
GR WT/C	38KG	24KG	35KG
PACKAGE SIZE	70X33X23CM	66X29X17CM	117X29X23CM
QTY/20'CY	/	720	350



Tool Cabinet

SPECIFICATIONS								
MODEL	PL-C300	PL-C310	PL-C320	PL-C330	PL-C500	PL-C600	PL-C700	PL-C800
N.W/G.W.	11/12KG	14.5/17.5KG	40/42KG	41/43KG	48.3/50.3KG	51.5/53.5KG	54/56KG	56.3/58.3KG
PACKAGE SIZE	71x40.5x23CM		82.5x51x79CM		82.5x51x85.5CM			
MODEL	PL-C005	PL-C006	PL-C007	PL-C008	PL-C500A	PL-C600A	PL-C700A	
N.W/G.W.	52.3/54.5KG	55.5/57.7KG	58/60.2KG	60.2/62.2KG	59/61KG	62/64KG	63/65KG	
PACKAGE SIZE	82.5x51x85.5CM				81X50.5X86.5CM			



Tire repair cabinet

SPECIFICATIONS		
MODEL	PL-Q40	PL-Q80
NET WT	9KG	48KG
GR WT/C	10.5KG	52KG
PACKAGE SIZE	62X62X14CM	139X41X41CM



Shortwave Infrared Curing Lamp

SPECIFICATIONS					
MODEL	HK-002A	HK-003A	HL-2	HL-3	HL-3A
MAX. POWER	2X1100W	3X1100W	2X1000W	3X1000W	3X1000W
CURING AREA	800X800mm	800X800mm	800X800mm	800X800mm/800X500mm	1200X1000mm
WORKING DISTANCE	600-800mm	600-800mm	600-800mm	600-800mm	600-800mm
NET WT	19KG	37KG	9KG	10KG	38KG
DIMENSION	800X710x210mm(16.5KG) 1500X150x150mm(2.5KG)	725X235x790mm(12KG) 760X55x1120mm(14KG) 1550X160x595mm(21KG)	580X240x440mm(7.8KG) 125X75x1555mm(1.2KG)	580X240x440mm(10KG) 75X75x1555mm(2KG)	1580X220x480mm(23.5KG) 880X270x630mm(12.7KG) 1240X100x890mm(12.7KG)



Ozone sterilizer

SPECIFICATIONS				
MODEL	OG-20	OG-10	OG-5	OG-3.5
RATED VOLTAGE	AC 220V	AC 220V	AC 220V	AC 220V
RATED POWER	150 W	150 W	150 W	150 W
OZONE PRODUCTION	20 g/h	10 g/h	5 g/h	3.5 g/h
TIME SETTING	1~60 mins	1~60 mins	1~60 mins	1~60 mins
N.W.	2.6 kg	2.6 kg	2.6 kg	2 kg
DIMENSION	370x210x310 mm	370x210x310 mm	370x210x310 mm	250x160x200 mm



Barrel pump

MODEL	HG-1027	HG-1028	HG-1029
NET WT	18KG	18KG	6KG
GR WT/C	19.1KG	19.1KG	8KG
PACKAGE	1PCS/PKG	1PCS/PKG	1PCS/PKG
PACKAGE SIZE	475X310X365 mm	475X310X365 mm	385X320X285 mm

SPECIFICATIONS



Walnut Blaster

MODEL	CR-3M
POWER SUPPLY	AC220V 50Hz 1ph
MAX.POWER	1200W
COMPRESSED AIR	6~8 Bar
TANK CAPACITY	3KG
N.W./G.W.	28KG/38KG
DIMENSIONS	685X570X950 mm

SPECIFICATIONS



Automotive Smoke Machine Leak Detector

MODEL	SG-1P	SG-2P
POWER SUPPLY	AC220V 50Hz 1ph	AC220V 50Hz 1ph
MAX.POWER	18Psi	42Psi
SMOKE FLOW	1~6L/min	1~6L/min
OIL RESERVOIR CAPACITY	75ml	75ml
N.W./G.W.	2.3KG/3.9KG	3.6KG/5.6KG
DIMENSIONS	280X260X320 mm	380X355X285 mm

SPECIFICATIONS

68 pcs Tool Sets for Electric Vehicles Repairing



106 pcs Tyre Maintenance Tool Kit



208 pcs Auto Repair Tool Kit



234 pcs Auto Repair Tool Kit



421 pcs Auto Repair Tool Kit





HFC-60



HFC-55/HFC-50



HFC-60A/HFC-55A/HFC-50A

Color Display Sheet Metal Repair Machines

SPECIFICATIONS						
Model	Input Voltage	Input Current	Maximun Current	Vacuum Suction	Single Spot Welding Thickness	Duplex Spot Welding Thickness(optional)
HFC-60	380V 2PH 220V 1PH 50HZ	380V\60A 220V\90A	9800A	200	0.8-1.5mm	3.0+3.0mm
HFC-55	380V 2PH 220V 1PH 50HZ	380V55A 220V\85A	9200A	200	0.5-1.2mm	2.0+2.0mm
HFC-50	380V 2PH 220V 1PH 50HZ	380V50A 220V\75A	8800A	200	0.5-1.2mm	1.5+1.5mm
HFC-60A	380V 2PH 220V 1PH 50HZ	380V\60A 220V\90A	9800A	200	0.8-1.5mm	3.0+3.0mm
HFC-55A	380V 2PH 220V 1PH 50HZ	380V55A 220V\85A	9200A	200	0.5-1.2mm	2.0+2.0mm
HFC-50A	380V 2PH 220V 1PH 50HZ	380V50A 220V\75A	8800A	200	0.5-1.2mm	1.0+1.2mm



HFM-60/HFM-55/HFM-50/HFM-45



HFM-60A/HFM-55A/HFM-50A

Multifunctional Sheet Metal Repair Machines

SPECIFICATIONS						
Model	Input Voltage	Input Current	Maximun Current	Vacuum Suction	Single Spot Welding Thickness	Duplex Spot Welding Thickness(optional)
HFM-60	380V 2PH 220V 1PH 50HZ	380V\60A 220V\90A	9800A	200	0.8-1.5mm	3.0+3.0mm
HFM-55	380V 2PH 220V 1PH 50HZ	380V55A 220V\85A	9200A	200	0.5-1.2mm	2.0+2.0mm
HFM-50	380V 2PH 220V 1PH 50HZ	380V50A 220V\75A	8800A	200	0.5-1.2mm	1.5+1.5mm
HFM-45	380V 1PH	45A	8800A	----	0.5-1.2mm	0.8+1.2mm
HFM-60A	380V 2PH 220V 1PH 50HZ	380V\60A 220V\90A	9800A	200	0.8-1.5mm	3.0+3.0mm
HFM-55A	380V 2PH 220V 1PH 50HZ	380V55A 220V\85A	9200A	200	0.5-1.2mm	2.0+2.0mm
HFM-50A	380V 2PH 220V 1PH 50HZ	380V50A 220V\75A	8800A	200	0.5-1.2mm	1.0+1.2mm



HFS-55/HFS-50/HFS-45



HFC-60A/HFC-55A/HFC-50A

Digital Display Sheet Metal Repair Machines

SPECIFICATIONS						
Model	Input Voltage	Input Current	Maximun Current	Vacuum Suction	Single Spot Welding Thickness	Duplex Spot Welding Thickness(optional)
HFS-55	380V 2PH 220V 1PH 50HZ	380V60A 220V\90A	9800A	200	0.8-1.5mm	3.0+3.0mm
HFS-50	380V 2PH 220V 1PH 50HZ	380V55A 220V\85A	9200A	200	0.5-1.2mm	2.0+2.0mm
HFS-45	380V 1PH	380V\50A 220V\80A	8800A	----	0.5-1.2mm	1.5+1.5mm
HFS-60A	380V 2PH 220V 1PH 50HZ	380V\60A 220V\90A	9800A	200	0.8-1.5mm	3.0+3.0mm
HFS-55A	380V 2PH 220V 1PH 50HZ	380V55A 220V\85A	9200A	200	0.5-1.2mm	2.0+2.0mm
HFS-50A	380V 2PH 220V 1PH 50HZ	380V50A 220V\75A	8800A	200	0.5-1.2mm	1.0+1.2mm

SPECIFICATIONS

Model	HFL-1600	HFL-2500
Input Voltage	1-220V 50HZ	1-220V 50HZ
Input Capacity	<500VA	<500VA
Rated Stored Energy	1600J	2500J
Operating Voltage Range	30-200V	30-200V
Welding Power	10-20 minutes, depending on stud diameter	
Welding Stud Diameter Range	M3-M8	M3-M10
Welding Materials	Low-carbon steel, stainless steel, aluminum, copper	
Protection Class	Ip23	Ip23
Dimensions	450*215*365(mm)	450*215*365(mm)
Weight	18kg	19kg

Aluminum Body Sheet Metal Repair Machines



HFL-1600/HFL-2500



IRN Series



IRC Series

Industrial Hose Reel

SPECIFICATIONS							
Model	IRN1153	IRN2104	IRN2154	IRN3102	IRN3152	IRC1103	IRC2104
Inlet/outlet	3/8"	1/2"	1/2"	1/4"	1/4"	3/8"	1/2"
Max Pressure	20BAR	138BAR	138BAR	345BAR	345BAR	20BAR	138BAR
Hose Capacity (INCH)	3/8"	1/2"	1/2"	1/4"	1/4"	3/8"	1/2"
Hose Capacity (LENGTH)	15m	10m	15m	10m	15m	10m	10m
Application	Air, water reel	Oil reel	Oil reel	Grease reel	Grease reel	Air reel	Oil reel



BL-202



BL-602

Brake Disc Drive

SPECIFICATIONS		
Model	BL-202	BL-602
Input Voltage	220V/110V	220V/110V
Working Height Min/max	1/1.25m	1/1.25m
Drive Speed	98rpm	98rpm
Ambient Temperature Range	-20°Cto40°C	-20°Cto40°C
Year Of Construction	show on information plate	
Turning Accuracy	≤0.005mm	≤0.005mm
Brake Disc Runout	≤0.005mm	
Brake Disc Thickness Variation	0.005-0.01mm	0.005-0.01mm
Brake Disc Surface Roughness	Ra1.5-2	Ra1.5-2
Weight	7.3kg	7.3kg

A/C R134a Service Station

SPECIFICATIONS	
Model	PL-AC100A
Power Supply	1PH 220V 50Hz
Work Temperature	5~50°C
Vacuum Generated Speed	60L/min
Machine Power	770W
Refrigerant Recovery	R134a
Accuracy Of Electronic Scale	±10 g
Max. Weight Of The Electronic Scale	35kg
Capacity Of Refrigerant Tank	12L
N.W/G.W	52.5kg/57kg



PL-AC100A



Small Size Hose Reel



PL-HR2810N

PL-HD2810N

PL-HW2810N

Medium Size Hose Reel



PL-HR3815

PL-HD3815

PL-HW3815

New Small Size Hose Reel



PL-HR2810J

PL-HD3810J

PL-HW2810J

Industrial Hose Reel

SPECIFICATIONS									
Model	PL-HR2810N	PL-HD2810N	PL-HW2840N	PL-HR3815	PL-HD3815	PL-HW3815	PL-HR2810J	PL-HD3810J	PL-HW2810J
N.W	3.6kg	4.1kg	3.6kg	5.03kg	5.73kg	5.03kg	3.6kg	4.2kg	3.6kg
Tube(Wire) Size	6.5*10.5mm*10m	8.4mm*15m*1.5SQ*2 cores	6.5*10.5mm*10m	8.0*12mm*15m	8.4mm*15m*1.5SQ*3 cores	8.0*12mm*15m	6.5*10.5mm*10m	8.4mm*15m*1.5SQ*3 cores	6.5*10.5mm*10m
Tube Material	1/4 Polyether PU tube	/	1/4 Polyether PU tube	3/8 Polyether PU tube	/	3/8 Polyether PU tube	1/4 Polyether PU tube	/	1/4 Polyether PU tube
Working Pressure(Power)	1.4Mpa	6A 220V	1.4Mpa	1.4Mpa	6A 220V	1.4Mpa	1.4Mpa	6A 220V	1.4Mpa
Main body Dimensions	280*110mm		310*120mm			300*110mm			



FREELY COMBINED



FREELY COMBINED



FREELY COMBINED



FREELY COMBINED



FREELY COMBINED

*Can Be Freely Combined

SPECIFICATIONS					
Model	PL-HW2810F Atmospheric Pressure Water Hose Reel	PL-HW3815F Water Hose Reel	PL-HR2810F Air hose reel	PL-HR3815F Air hose reel	FCN End Cap
N.W	5.9kg	6.7kg	5.9kg	6.7kg	
Tube(Wire) Size	6.5*10.5mm*10m	8*12mm*10m	6.5*10.5mm*10m	8*12mm*10m	/
Tube Material	1/4 Polyether PU tube	3/8Polyether PU tube	1/4 Polyether PU tube	3/8Polyether PU tube	/
Working Pressure(Power)	1.4Mpa	1.4Mpa	1.4Mpa	1.4Mpa	/
Main body Dimensions	390*380*220mm	390*380*220mm	390*380*220mm	390*380*220mm	380mm
Model	PL-HD3810F Electrical Cord Hose Reel	PL-HD3815F Electrical Cord Hose Reel	PL-HRW2810F High-pressure air & water hose reel	PL-TOR2810F High-pressure water hose reel	PL-TOR3810F High-pressure water hose reel
N.W	6.4kg	7.5kg	6.9kg	7.3kg	7.9kg
Tube(Wire) Size	8.4mm*10m*1.5SQ*3cores	8.4mm*15m*1.5SQ*3cores	6.5*10/7.2*10.5mm*7m	6.3*13.3mm*10m	9.5*18mm*10m
Tube Material	1/4 Polyether PU tube	3/8 Polyether PU tube	1/4 Polyether PU tube	1/4 steel wire hose	3/8 steel wire hose
Working Pressure(Power)	6A 220V	6A 220V	1.4Mpa	20Mpa	20Mpa
Main body Dimensions	390*380*220mm	390*380*220mm	390*380*220mm	390*380*220mm	390*380*220mm

Air Compressor



PL-C1200A



PL-C1300A



PL-C1400A

Bead Booster

Model	PL-C1200A	PL-C1300A	PL-C1400A
Capacity	20L	20L	38L
Package Size	48X40X30CM	45X40X33CM	60X38X40CM
N.W/G.W	4/4.5KG	10.5/11.5KG	14/14.5KG

SPECIFICATIONS

Fuel Injector Tester & Cleaner

SPECIFICATIONS

Model	HP-2M	HP-4M
Power Supply	AC220V ±10%	AC220(110)V ±10%
Frequency	50/60Hz	50/60Hz ±0.5Hz
Power	70W	270 W
Working Temperature	10°C~40°C	+10°C ~ +30°C
System Pressure	0~0.6MPA	0~0.6MPA
Timing	0~10Min	0~20Min
Turning Speed Range	0~7500r/min	750~7500 r/min
Pulse Numbers	0~9900times/step length 100	
Pulse Length	0-20.0 ms step length 0.1 ms	
Dimensions	/	370X300X340 mm



HP-2M



HP-4M


Fuel Injector Tester & Cleaner

SPECIFICATIONS


Model	HP-7
Power Supply	AC220V ± 10% 50/60Hz ± 0.5
Environmental Magnetic Intensity	<400A/M
Ultrasonic Power	100w
Injector Operating Frequency	0-7500rpm,variable in 50rpm
Injector Pulse	0-9900pulses;variable in 100pulses
Spray Time	0-10Min
Pulse Width(pmw)	0-20ms in 0.1ms increments
System Pressure	0-0.6MPA
N.w/g.w	16/18kg




HP-7

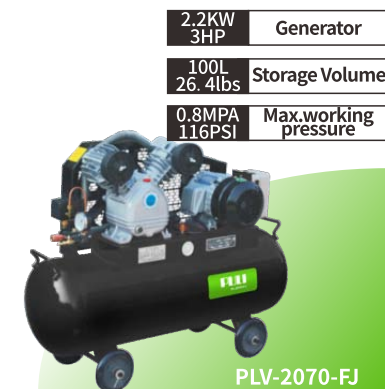


PLV-2070-FJ

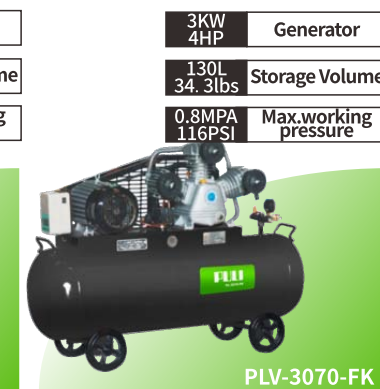

PLV-3070-FK

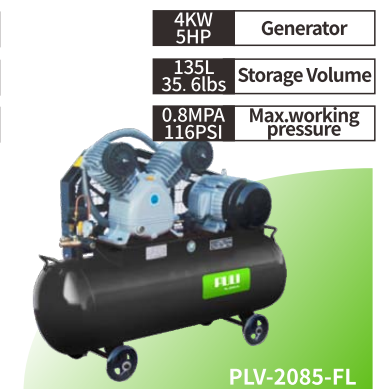


PLV-2085-FL

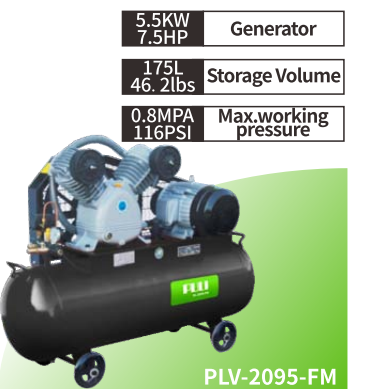


PLV-2095-FM




PLW-3085-FN

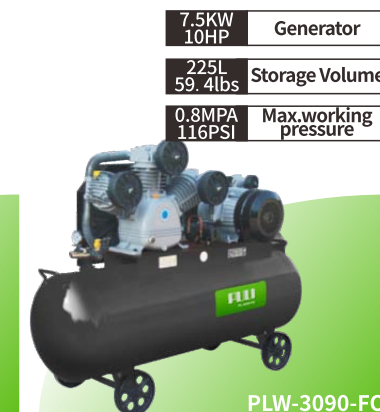

PLW-3090-FO

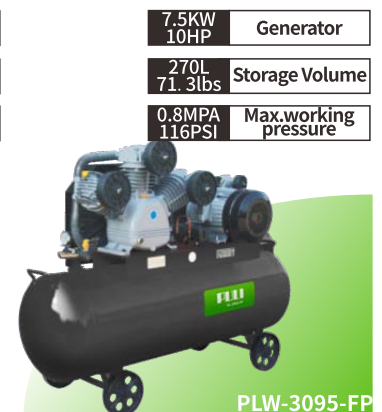


PLW-3095-FP

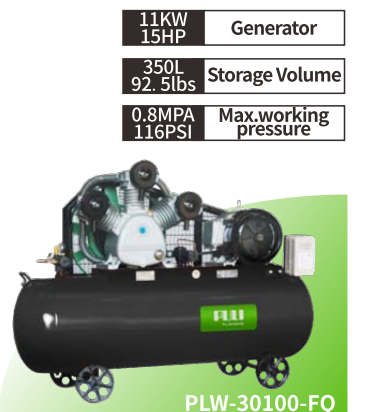

PLW-30100-FQ



PLV-70150-DF

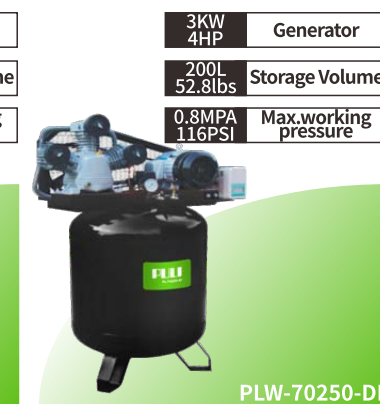

PLW-70250-DI



PLV-85250-DG



PLV-95250-DH




PLW-85300DJ



PLW-90300DL



PLW-95300DX

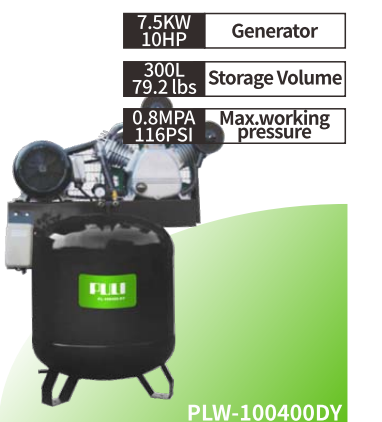

PLW-100400DY



BS-10A/12A/15A/18A/22A



BS-30A

Auto Start Charging Machine

SPECIFICATIONS

Model	Input Voltage	Input Current	Maximum Instantaneous Current	Maximum Charging Power Supply	Output Voltage
BS-10A	2PH 380V 1PH 220V 50HZ	9-30V Adjustable	1000A	50A	12V/24V(DC)
BS-12A	2PH 380V 1PH 220V 50HZ	9-30V Adjustable	1200A	70A	12V/24V(DC)
BS-15A	2PH 380V 1PH 220V 50HZ	9-30V Adjustable	1500A	100A	12V/24V(DC)
BS-18A	2PH 380V 1PH 220V 50HZ	9-30V Adjustable	1800A	120A	12V/24V(DC)
BS-22A	1PH 380V	9-30V Adjustable	2200A	150A	12V/24V(DC)
BS-30A	3PH 380V	9-30V Adjustable	3000A	200A	12V/24V(DC)



BF-20/BF-30



BF-40/BF-60



BF-80

Car Battery Charging Machine

SPECIFICATIONS

MODEL	Input Power	Charging Voltage	Output Voltage	Maximum Output Voltage
BF-20	Two Phase 380V Single Phase 220V 50HZ	12V/20A		24V/10A 12V/20A
BF-30	Two Phase 380V Single Phase 220V 50HZ	6V/12V/24V		24V/15A 12V/30A
BF-40	Two Phase 380V Single Phase 220V 50HZ	6V/12V/24V		24V/20A 12V/40A
BF-60	Two Phase 380V Single Phase 220V 50HZ	6V/12V/24V		24V/30A 12V/60A
BF-80	AC380V/50HZ	12V/24V/36V/48V/78V	12V/24V/36V/48V/78V	80A