


THX-325H

FOR NON-INSULATED TERMINAL UP TO 400mm² (HEXAGON CRIMPING)

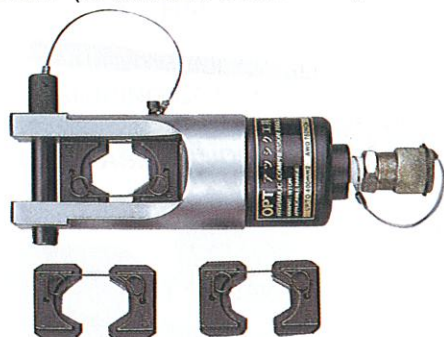


THX-325

FOR NON-INSULATED TERMINAL UP TO 400mm² (HEXAGON CRIMPING)




THX-185H

FOR NON-INSULATED TERMINAL UP TO 185mm²

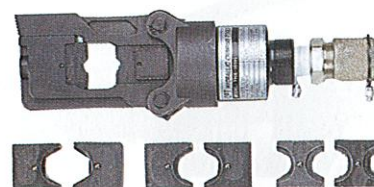

THX-240H


FOR NON-INSULATED TERMINAL UP TO 240mm²

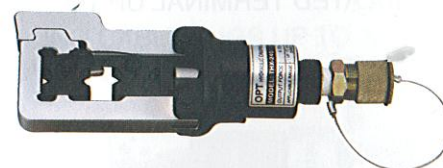

TP-58A

FOR CRIMPING CABLE LUGS UP TO 240mm²


- 20mm JAW OPENING
- HEXAGON CRIMPING

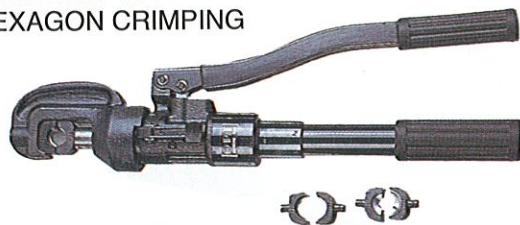

TP-58FR

FOR CRIMPING CABLE LUGS UP TO 240mm²

- 20mm JAW OPENING
- FIBERGLASS HANDLES
- HEXAGON CRIMPING

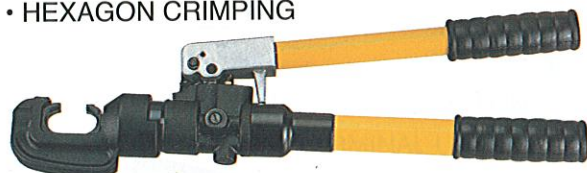

TP-413

- *WITH AR-413 DIE ADAPTOR FOR CRIMPING CONNECTOR UP TO 400mm² USE R 30TYPE DIE(HEXAGON CRIMPING)
- *WITH AR-415 DIE ADAPTOR FOR CRIMPING ALUMINIUM CONNECTOR DEEP INDENT DIE 35-50mm², 70-95mm²
- *WITH AR-416 DIE ADAPTOR FOR CRIMPING ALUMINIUM CONNECTOR DEEP INDENT DIE 120-150mm², 185-240mm²

TP-413H

TP-413H

FOR CRIMPING CONNECTOR



TP-413

FOR CRIMPING CONNECTOR



MODEL	OUTPUT TONS	APPLICABLE RANGE			STANDARD DIES mm ²	WEIGHT (KGS)	LENGTH (MM)
		JIS mm ²	DIN mm ²	AWG/MCM			
THX-325	12	38-325	35-400	750	WITH DIE 35 50 70 95 120 150 185 240 300 400	5.2	528
THX-325H	12	38-325	35-400	750	WITH DIE 35 50 70 95 120 150 185 240 300 400	3.0	210
TP-58A	8	8-250	10-240	400	WITH DIE 10 16 25 35 50 70 95 120 150 185 240	5.2	528
THX-185H	6	8-150	10-185	350	WITH DIE 10-16 25-35 50-70 95-120 150 185	1.4	220
TP-58FR	8	8-250	10-240	400	WITH DIE 10 16 25 35 50 70 95 120 150 185 240	5.2	528
THX-240	6	8-250	10-240	400	WITH DIE 10/16 25/35 50/70 95/120 150 185 240	2	230
TP-413	12	CHECK CATALOGUE PAGE 62				6	610
TP-413H	12					4	245